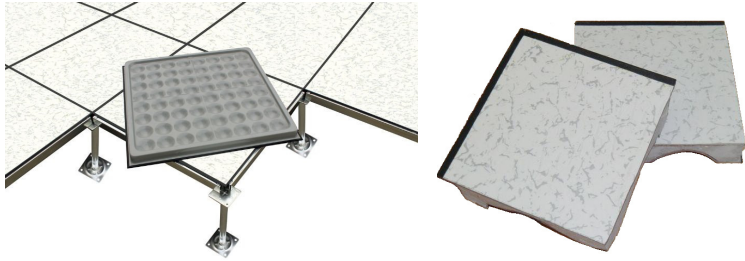

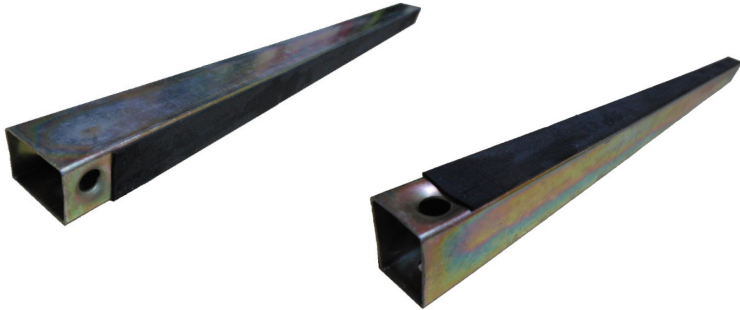


Specification:		
Product Description:	Concrete Core Steel Raised Floor HPL Top.	
Panel Dimension:	600mm x 600mm x 35mm	
	HPL Top Thickness: 1mm Top Plate Thickness: 0.7mm Bottom Plate Thickness: 0.8mm	
Material Description:	Made of high quality deep stretch coil steel sheet and SPCC steel sheet, w/c is punched, spot-welded, coated with epoxy powder after has been phosphorated. The panel is filled with foamed cement inside. The top steel sheet is stuck with anti-wear and antistatic HPL.	
Fire Protect Performance	Class A	
Concentrated Load	>800 lbs. / >3560 N / >363 kg.	
Impact Load / N	>536 N	
Ultimate Load / N	>11250 N	
Uniform Load N / m ²	>16100 N / m ²	
Rolling Load	10 times	3560 N
	10000 times	2670 N
Flat Head Pedestal:		
	Top Dim: 75.5mm x 75.5mm x 2.0mmThk. M18 steel threaded rod as the screw with a length of 75mm. It has a 30mmØ steel tube in 1.5mm thick and a height of up to 300mm Base Plate Dim: 94mm x 94mm x 2.0mmThk.	
Screw	Top Dim: 10.5mmØ; Screw length 45mm.	
Metal Stringer:		
	Dim: 22mmW x 572mmL x 30mmH Cold bent steel sheet of having round slots on each end for optional screwing. Rubber Top Dim: 20mmW x 540mmL x 2.0mmThk. Weight: approximate 350g., Thickness: approximate 2mm	

Agents in the U.A.E for:

